

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/AU05/000034

International filing date: 14 January 2005 (14.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: AU  
Number: 2004900187  
Filing date: 15 January 2004 (15.01.2004)

Date of receipt at the International Bureau: 02 February 2005 (02.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

BEST AVAILABLE COPY



Australian Government

PCT/AU2005/000034

Patent Office  
Canberra

I, LEANNE MYNOTT, MANAGER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2004900187 for a patent by COMMONWEALTH SCIENTIFIC AND INDUSTRIAL RESEARCH ORGANISATION as filed on 15 January 2004.



WITNESS my hand this  
Twenty-fourth day of January 2005

A stylized, handwritten signature in black ink.

LEANNE MYNOTT  
MANAGER EXAMINATION SUPPORT  
AND SALES

AUSTRALIA  
Patents Act 1990

PROVISIONAL SPECIFICATION

**Applicant:**

COMMONWEALTH SCIENTIFIC AND INDUSTRIAL  
RESEARCH ORGANISATION

**Invention Title:**

METHOD OF CONCEALING AN IMAGE

The invention is described in the following statement:

---

## METHOD OF CONCEALING AN IMAGE

### Field of the Invention

5           The present invention relates to a method of  
creating a security image in which at least one image is  
concealed. In one embodiment an encoded image is  
concealed within a visible image. Embodiments of the  
invention have application in the provision of security  
10 devices which can be used to verify the legitimacy and  
presence of a document or instrument, for example a credit  
card. Other embodiments can be used to provide novelty  
items which are protected against counterfeiting.

### 15 Background to the Invention

          In order to authenticate and verify the  
originality of, and to prevent unauthorised duplication or  
alteration of documents such as banknotes, credit cards  
20 and the like, security devices are often incorporated.  
The security devices are designed to provide some proof of  
authenticity and deter copying. Despite the wide variety  
of techniques which are available, there is always a need  
for further techniques which can be applied to provide a  
25 security device.

          A variety of techniques have been developed to  
conceal latent images within security documents and  
instruments. Perhaps the earliest such technique is the  
Watermark. In this approach, a latent image is provided  
30 on a paper substrate such that the image is invisible when  
the paper is viewed in reflection, but visible when it is  
viewed in transmission.

          A more recent means of concealing images for  
security applications is known broadly as "Modulated  
35 Digital Images" (MDI). As noted by Amidror (Issac  
Amidror, "The Theory of the Moiré Phenomenon", Kluwer  
Academic Publishers, Dordrecht, 2000, pages 185-187), when

two locally periodic structures of identical periodicity are superimposed upon each other, the microstructure of the resulting image may be altered (without generation of a formal Moiré pattern) in areas where the two periodic  
5 structures display an angle difference of  $\alpha = 0^\circ$ . The extent of the alteration in the microstructure can be used to generate latent images which are clearly visible to an observer only when the locally periodic structures are cooperatively superimposed. This principle forms the  
10 basis of several techniques for concealing or encoding latent images by modulating periodic structures. These latent images can only be observed when they are superimposed upon a corresponding, non-modulated structure. Accordingly, a modulated image can be  
15 incorporated in an original document and a decoding screen corresponding to the non-modulated structure used to check that the document is an original - e.g. by overlaying a modulated image with a non-modulated decoding screen to reveal the latent image.

20 While such techniques are themselves useful, where the presence of such images can be detected, there is a risk that malicious parties will develop techniques for decoding such images or replicating them. Accordingly, it would be desirable to provide a technique  
25 which is suitable for concealing at least modulated digital images and preferably other image types as well.

#### Summary of the Invention

30 The invention provides a method of creating a security image from two or more images comprising:  
manipulating tonal values of each image element of a first image to take values within a first set of tonal values;  
35 manipulating tonal values of each image element of a second image to take values within a second set of tonal values; and

forming a security image from the manipulated tonal values of the first and second images in which at least one of the first and second images is concealed in such a manner that at least one concealed image can  
5 subsequently be decoded from the security image.

The tones may be grey scale tones or colour tones.

In one aspect, the invention is used to conceal an encoded image within a visible image. In this  
10 embodiment, the first image is a visible image and the second image is an encoded image which can be decoded using a decoding screen, the encoded image being the image concealed in the security image. There may also be additional visible or encoded images.

15 The encoded image is typically a digitally modulated image.

The method may involve converting a latent image to obtain an encoded image.

In this embodiment, it is preferred that the  
20 first set of tonal values is larger than the second set of tonal values. Preferably the ratio of the first set of tonal values to the second set of tonal values is in the range of 55:45 to 80:20 and more preferably in the range 60:40 to 70:30.

25 It is preferred that the sum of the number of tones in the first and second sets is equal to the number of available tones for the image representation technique.

In one embodiment, each of the first and second sets of tonal values are ranges of sizes whose sum is  
30 equal to the number of available tones in the range of tones for the image representation technique. In this embodiment it is preferred that each of the first and second images are full tone range images and that each of the first and second images are manipulated by  
35 proportionally compressing the values of the tones to take values within the first and second ranges. The image may then be formed by adding the tonal values of corresponding

image elements. These combined image elements take values within the full tonal range. By way of example, where the original tonal range is 0-255 of grey-scale tones, the first image may be compressed to 0-179 and the second  
5 image may be compressed to 0-76. The added tonal values are added to take values between 0-255.

In another aspect, the invention is used to conceal a plurality of images within a security image in such a manner that they can each be decoded by a  
10 processing means.

This embodiment is particularly suited to combining a plurality of two tone images including at least first image and second image, by allocating each image element of each two tone image one of the values of  
15 the bit, and

wherein the security image is formed by adding the values of the respective bits to obtain a grey scale value for each image elements.

Thus, in this embodiment, segments (e.g. bits) of  
20 a code for defining the tonal value (e.g. grey scale value) of each image element are allocated as the sets of tonal values for respective ones of the plurality of images so that the segments can be combined to form a composite tonal value of each image element without  
25 disturbing the values of the segments so they, and hence the plurality of images, can be decoded.

The invention also extends to security devices incorporating security images made in accordance with the above methods.

30 Such security devices may be stand alone devices or may be incorporated as parts of documents, instruments etc. - for example, they may be used in passports, security cards, credit cards and bank notes.

Accordingly, the invention provides a security  
35 device comprising:

a security image formed from having a first tonal image and a second tonal image combined in such a manner

that at least one of the first and second tonal images is concealed and in such a manner that at least one concealed image can subsequently be decoded from the security image,

5 wherein said first and second tonal images are formed by manipulating tonal values of each image element of a first and second image to take values within a first and second set of tonal values respectively.

It will be appreciated that the term "image" is used herein in a generic sense to refer to a  
10 representation of a person, place or thing including patterns and the like.

The term "security image" is used to refer to an image which contains one or more concealed images. It will be appreciated that the concealed image need only be  
15 in a portion of the area of the security image. As tones are manipulated to conceal the images, these security images are also referred to as "Tonagrams".

In this specification, "Image elements" refer to image portions which are manipulated collectively.  
20 Typically, these will be pixels, however, they may be groups of pixels (e.g. a 2 x 2 matrix of pixels), depending on the desired resolution and reproduction technique.

In this specification, any image or images used  
25 in the formation of a security image which are intended to be readily apparent to an observer in a finished security image are referred to as "visible images".

Similarly, images used in the formation of a security device which are to be encoded and hidden in the  
30 security image are referred to as "latent images" - the latent images are intended to be visible once decoded.

Once the latent images have been encoded, for example using a MDI algorithm such as that employed to make a Phasegram, Binagram or  $\mu$ -SAM, the images are  
35 referred to in this specification as "encoded latent images" or "encoded images".

Once visible images are manipulated to take

values within a set of tonal values different to those used to initially represent the visible images they are referred to in this specification as "tonal visible images".

5                Similarly, when the tonal range of encoded latent images have been manipulated, the resulting images are referred to as "tonal encoded latent images" or "tonal encoded images".

10              However, it will be appreciated that these tonal images do not necessarily have to be produced and that the security image can be formed directly from the tonal values.

15              "Concealed images" are the latent images which have been hidden and cannot be observed without a decoding operation. Typically, the concealed image will be an encoded image and the decoding operation will be overlaying the security image with a decoding screen.

20              Further features of the invention will become apparent from the following description of preferred embodiments of the invention.

#### Brief Description of the Drawings

25              Preferred embodiments of the invention will be described with reference to the accompanying drawings:

30              Figure 1 depicts a visible grey scale image of the first embodiment of the invention in a full tonal range of 0-255 tones,

                Figure 2 depicts a black and white BinaGram of the latent image of the first embodiment of the invention covering the full tonal range of 0-255 tones,

                Figure 3 depicts the appropriate MDI screen which reveals the latent image when overlaid upon Figure 2,

35              Figure 4 depicts Figure 1 restricted to the tonal range 0-179 (that is, the compressed image V1)

                Figure 5 depicts Figure 2 restricted to the tonal

range 0-76 (that is, the compressed image H1),

Figure 6 depicts the additive combination of Figure 4 and Figure 5. The resulting TonaGram T1 contains the full tonal range of 0-255 tones,

5 Figure 7 depicts the image observed when the MDI screen in Figure 3 is overlaid upon Figure 6.

Figure 8 depicts a colour picture containing 256 tones of three primary colours (providing approximately 16 million colour combinations). This is the visible image of  
10 the second example of the first embodiment of the invention,

Figure 9 depicts the resulting tonagram combination of figure 8 and figure 3 in the ratio 60%:40% respectively,

15 Figure 10 depicts the tonagram of figure 9 partially overlaid with the screen in Figure 3,

Figure 11 depicts a tonagram consisting of a black-and-white visible image combined with an identical, but coloured MDI Binagram,

20 Figure 12 depicts the tonagram in Figure 11 partially overlaid with the MDI screen in Figure 3,

Figure 13 is a schematic depicting the process of forming a tonagram containing several images and the method of extracting one of the images from the tonagram.

25

### Description of the Preferred Embodiments

#### First Embodiment

Any digital system employed to depict continuous  
30 tone images has to reduce the number of shade levels to a discrete number. This applies to both grey scale and colour images. According to one standard (8 bit), the range of shades employed is 256, numbered from 0 to 255 and defined as levels of light output from a computer  
35 monitor. Hence in a grey scale depiction, 255 is white and 0 is black (i.e. there are 8 bits for each of red, green, and blue). Using the red-green-blue (RGB) colour system,

(255R, 255G, 255B) is white and (0R, 0G, 0B) is black. Other standards incorporate 65,536 tones (at least for grey; 16 bit standards) and 4096 tones (12 bit standard). Similar standards are used for other colour separation techniques such as CYMK.

The central principle of the first embodiment of the present invention is to form a security image which unobtrusively combines one or more visible images with one or more concealed latent images by partitioning each of the visible and latent images into selected tonal ranges and then combining them into a single security image using a suitable algorithm. The effect of reconstituting an image into a reduced tonal range is to lessen the colour range or contrast visible in the image. The image therefore adopts an increasingly "washed-out" appearance as its tonal range is decreased. An image partitioned into a wide tonal range will therefore be more clearly visible and distinct than one constituted within a narrow tonal range. Thus, when a visible image, portrayed in a wide tonal range, is combined with a latent image encoded using a modulated digital image (MDI) technique and portrayed in a narrower tonal range, the latter may become exceedingly difficult to see against the more clearly distinct background of the former. This concealment is amplified by the nature of most MDI encoded latent images, which typically have a uniformly grey or intermediate appearance. When the security image is overlaid with the appropriate MDI decoding screen however, the latent image is revealed as a result of the selective silhouette produced by the screen. In this way it becomes possible to conceal latent images incorporated within clearly visible images.

To most successfully implement this technique, an optimal choice is required in the tonal ranges employed for the visible and the latent image. In order to make the visible image highly obvious, a large tonal range is desirable. The same is true for the latent image, which

is ideally also constructed with a large tonal range. However, the latent image is more effectively concealed against the background of the visible image, when the tonal range of the visible image is large relative to that  
5 of the latent image.

In order to maximise the contrast and visibility of both the visible image (under ambient conditions) and the latent image (when overlaid with a screen), a large tonal range is required. A security device having a  
10 security image of this type will consequently typically employ the full tonal range available for the method of display or reproduction employed. Since a limited tonal range exists for any one method of displaying an image, a  
15 complementarity in the tonal ranges of the visible and the latent image must occur in such a case. That is to say, if the entire tonal range is cumulatively employed, then increasing the tonal range of the visible image means that the tonal range of the latent image must decrease  
20 correspondingly. The cumulative number of tonal ranges present in the tonal visible images and the tonal concealed latent images may not exceed the maximum number of tones available in the method of image representation employed. In the optimal case, the tonal range used for the visible image will be large enough (both in absolute  
25 terms and relative to the tonal range of the latent image) to make the visible image highly obvious under ambient conditions while simultaneously concealing the latent image effectively. However, the tonal range of the visible image must not be so large as to cause the latent  
30 image to have so narrow a tonal range as to be indistinguishable when overlaid with the appropriate MDI screen. An effective device therefore requires a careful balance in the competing requirements of clear visibility of the latent image when overlaid with an appropriate MDI  
35 screen, but clear concealment against the background of the visible image in the absence of the MDI screen.

There are a number of MDI techniques which can be

used with the present invention. One such technique, known as Screen Angle Modulation, "SAM", or its micro-equivalent, " $\mu$ -SAM", is described in detail in US patent number 5,374,976 and by Sybrand Spannenberg in Chapter 8  
5 of the book "Optical Document Security, Second Edition" (Editor: Rudolph L. van Renesse, Artech House, London, 1998, pages 169-199), both incorporated herein by reference. In this technique, latent images are created within a pattern of periodically arranged, miniature  
10 short-line segments by modulating their angles relative to each other, either continuously or in a clipped fashion. While the pattern appears as a uniformly intermediate colour or grey-scale when viewed macroscopically, a latent image is observed when it is overlaid with an identical,  
15 non-modulated pattern on a transparent substrate.

We have developed another technique of this type which we refer to as a PHASEGRAM which is disclosed in Australian provisional application number 2003905861, entitled "Method of Encoding a Latent Image", filed 24  
20 October 2003, the disclosure of which is incorporated herein by reference. In this technique, an image is encoded within a locally periodic pattern by selectively modulating the periodicity of the pattern. When overlaid upon or overlaid by the original pattern on a transparent  
25 substrate, the latent image or various shades of its negative becomes visible to an observer depending on the exactness of the registration.

We have also developed a further technique of this type which we refer to as a BINAGRAM which is  
30 disclosed in Australian provisional application number 2003902810, entitled "Method of Encoding a Latent Image", filed 4 June 2003, the disclosure of which is incorporated herein by reference. In this technique, an image is divided into pairs of adjacent or nearby pixels, which may  
35 be locally periodic or not. One of the pixels in each pair is then selectively modulated to the complementary grey-scale or colour characteristic of the other pixel.

Because of the presence of equal quantities of complementary pixels, a BINAGRAM has a uniform grey- or intermediate tone when viewed macroscopically. However, when overlaid upon or overlaid with an equivalent non-  
5 modulated pattern on a transparent substrate, the latent image or its negative becomes visible depending on the extent of registration.

The technique of the first embodiment is now explained further using a series of examples. In each  
10 example, a single visible image is combined with a single encoded latent image. The preferred embodiment can be applied to a variety of encoded latent image types. Without limiting the generality of this embodiment, a Binagram MDI image is employed for illustrative purposes  
15 in the examples of the embodiment described below. A Binagram contains, by definition, only 2 tones; usually black and white.

Further details on producing a Binagram can be found in Australian Provisional Patent application number  
20 2003902810 entitled: "Method of Encoding a Latent Image", lodged 4 June 2003. Details of other techniques such as p-SAM, and PHASEGRAM can be found in US 5,374,976 and Australian Provisional patent entitled "Method of Encoding a Latent Image", Patent application number: 2003905861  
25 (24 Oct 2003) respectively.

The first example of this embodiment describes the use of a black-and-white visible image and a black-and-white latent image. For this example the full tonal range will be considered to be 0-255 in a grey scale for  
30 illustrative purposes. The range 0-179 will be used for the visible image. This leaves the range 0-76 for the latent image (since  $179 + 76 = 255$ ). These ranges have been chosen merely to demonstrate the technique. Optimisation of the resulting security image will, as  
35 noted earlier in this specification, involve iteratively varying the respective tonal ranges used for the visible and latent image in order to achieve the best overall

effect.

The ranges selected for this example correspond to approximately 70% of the total tonal range for the visible image and 30% for the hidden image. These  
5 proportions can be varied to suit the images employed, the number of images and the application.

The visible image shown in Figure 1 is manipulated by being compressed from 0-255 tones to 0-179 tones using the contrast and brightness controls in a  
10 typical image processing software package, or specialised software developed for the purpose or photographically or other means known to the art. The manipulated tone value of each pixel of the original visible image ( $T_{OLD}^{vis}$ ) then becomes a new tone value ( $T_{NEW}^{vis}$ ):

15

$$T_{NEW}^{vis} = T_{OLD}^{vis} \times 179/255$$

The resulting tonal visible image is called V1 and is shown in Figure 4. While the compression is  
20 performed proportionally in this particular case, other techniques can be used.

The encoded latent image of Figure 2 is manipulated by being compressed from 0-255 tones to 0-76 using the contrast and brightness controls in a typical  
25 image processing software package, or specialised software developed for the purpose or photographically or other means known to the art. For this example the tone in each pixel of the original latent image ( $T_{NEW}^{lat}$ ) becomes replaced by a new tone ( $T_{OLD}^{lat}$ ) calculated by the formula:

30

$$T_{NEW}^{lat} = T_{OLD}^{lat} \times 76/255$$

The resulting tonal encoded image is called H1 and is depicted in Figure 5,

35

The images are now summed tonally into a security image. This means that wherever two pixels  $T_{NEW}^{lat}$  and  $T_{NEW}^{vis}$  overlap, they are combined into a new pixel having the

tone  $T_{TON}$  , where

$$T_{TON} = T_{NEW}^{lat} + T_{NEW}^{vis}$$

5           The resulting security image is the Tonagram,  $T_1$ ,  
which is shown in Figure 6. When overlaid with the  
appropriate MDI mask (Figure 3), the latent image is  
revealed superimposed upon the visible image (Figure 7) -  
i.e. the mask decodes the latent image sufficiently for  
10   the existence of the latent image to be perceived. For  
example, the nose 11, mouth 12, and left eye 13 of the  
girl in the latent image are now perceivable.

          The second example of this embodiment describes  
the use of a colour visible image and a black-and-white  
15   latent image. A colour image reproduced as a grey scale  
image in Figure 8 was employed as the visible image and  
the binagram shown in Figure 2 was used for the encoded  
latent image. In this example the three primary colours  
(red, green, blue) were scaled to 60% of the full tonal  
20   range (tones 0-153) and the latent image was scaled to 40%  
of the full tonal range (tones 0-101). The tonal visible  
image and tonal encoded latent image were then additively  
combined to give Figure 9. It will be appreciated that  
the use of colour tends to draw the observer's eye away  
25   from the "shadow" left by the encoded image. Figure 10  
illustrates this tonagram with a partial overlay of the  
MDI screen in Figure 3. The unscreened area 20 has a  
shadow whereas, in the screened area 21, the girl is  
visible. The latent image is thus made visible as a black  
30   and white image superimposed on the colour image.

          Colour binagrams can similarly be combined with  
grey scale or coloured images.

          In a third example of this embodiment, a black-  
and-white visible image is combined with an identical,  
35   colour MDI latent image using the method of the second  
example of this embodiment above. The resulting Tonagram  
is shown in Figure 11. The latent image is not visible

because it is identical to the visible image. However  
when the Tonagram in Figure 11 is overlaid with the MDI  
screen in Figure 3, the colour image in the screened areas  
30 is revealed. Thus, the black-and-white visible image  
5 becomes a coloured image when overlaid with the screen.  
This is depicted in Figure 12.

In an alternative approach, the sets of tonal  
value may be kept distinct - e.g. 0-179 and 180-255 with  
the security image being formed by interleaving image  
10 elements having manipulated tonal values originating from  
the first and second images respectively. In this  
approach, sets could also be in the form of a plurality of  
distinct ranges - e.g. 0-80, 125-224 and 81-124, 225-255 -  
this allows a greater degree of contrast to be achieved in  
15 the visible image.

#### Second Embodiment

A Tonagram may encode more than one continuous  
tone image. Separation of the latent images from the  
20 security image however requires electronic or mathematical  
computations based on a suitable algorithm, with the  
resulting security images decoded by a computer or  
dedicated device developed for the purpose, rather than  
using an overlaid screen.

25 If the display technology employed permits a  
number of hues or primary colours, each with a tone range,  
then each hue can be used independently to contain a  
single grey scale continuous tone image in conjunction  
with other 2-tone latent images or a multiple of 2-tone  
30 images.

The 2-tone latent images may be produced by  
dithering, half-toning, hatching or using some other means  
by which an image is rendered in two tones. Even dithered  
coloured images may be adapted to this embodiment.  
35 Modulated digital images and other synergistic latent  
images like Binagrams and Phasegrams are two tones per hue  
and are readily integrated to form multiple latent image

### Tonagrams.

One way in which a multiple latent image tonagram employing a machine-based encoding / decoding system may operate is illustrated in the following example in which  
5 an 8-bit binary code is used to address each pixel. Other multi-bit systems (e.g. 16-bit, 24-bit, or 32-bit, etc.) may also be used. The following example demonstrates the use of a single binary bit or digit to contain each image. Other carefully chosen multiple bit codes could be used  
10 and even the use of non-binary sequences is possible. The sequences need to be chosen so that information is not altered when the sequences are combined so that the information can subsequently be decoded from the security image.

15 A typical computer monitor uses an 8-bit binary code to describe the tone of each pixel on the screen. Such a code contains 8 numbers, each of which can only be a 0 or a 1. For example, if a pixel has a tone 11110110, this means it contains  $(1 \times 2^7) + (1 \times 2^6) + (1 \times 2^5) + (1 \times 2^4) + (0 \times 2^3) + (1 \times 2^2) + (1 \times 2^1) + (0 \times 2^0)$ . In decimal  
20 notation, this equals tone number 246. Using an 8-bit binary code therefore, pixel tones can go from 00000000 (which corresponds to decimal tone 0) to 11111111 (which corresponds to decimal tone 255). Thus, a computer  
25 monitor operating using 8-bit binary coding for the tones can display 256 different tones.

This system can be exploited by partitioning each image in a multiple image tonagram so that it is described by only one of the bits in the 8-bit code. For example, a  
30 2-tone image in an 8-image tonagram may be compressed so that all of its pixels are associated with only the first numeral in the code; that is, all of its pixels are either 00000000 (darker of the 2-tones) or 00000001 (lighter of the 2-tones). This is possible since the image contains  
35 only two tones. A second 2-tone image may be compressed such that all of its pixels are associated only with the second digit in the 8-bit binary code; that is they are

either 00000000 (darker tone) or 00000010 (lighter tone).  
A third 2-tone image may be compressed such that all of  
its pixels are associated with only the third digit in the  
code; that is all of its pixels are either 00000000

5 (darker tone) or 00000100 (lighter tone). This can be  
done for each of eight 2-tone images, up to the eighth  
image, whose pixels will be either 00000000 (darker tone)  
or 10000000 (lighter tone).

To achieve this, the image elements of the first  
10 latent image must be manipulated to the tonal range of the  
first bit. The second latent image must be compressed to  
the tonal range of the second bit. The third latent image  
must be compressed to the tonal range of the third bit.  
The fourth latent image must be compressed to the tonal  
15 range of the fourth bit. The fifth latent image must be  
compressed to the tonal range of the fifth bit. The sixth  
latent image must be compressed to the tonal range of the  
sixth bit. The seventh latent image must be compressed to  
the tonal range of the seventh bit. The eighth latent  
20 image must be compressed to the tonal range of the eighth  
bit.

The top row 100 of Figure 13 displays eight  
2-tone latent images. The next row 101 down in Figure 13  
shows each of the images compressed to the above tonal  
25 ranges, with the left most image compressed to the eighth  
(or left most) bit, the second from left to the seventh  
bit, and so on up to the right most latent image which is  
compressed to the first (or right most) bit.

When the latent images are now overlaid, their  
30 individual pixels will overlap each other. To combine the  
8 images into a single image, the binary codes of  
overlapping pixels are added. As the binary code of each  
pixel to be combined has either a 0 or a 1 in a unique  
position and 0's in all other positions, the resulting sum  
35 will have 0's and 1's whose position corresponds to their  
image number. For example, if the overlapping pixels of  
the eight images are:

00000001 (first image)  
00000010 (second image)  
00000000 (third image)  
5 00001000 (fourth image)  
00010000 (fifth image)  
00000000 (sixth image)  
01000000 (seventh image)  
00000000 (eighth image)

10

then the sum will be:

01011011

15

This signifies that the corresponding pixel in the first, second, fourth, fifth and seventh image has the lighter of its 2-tones present ("1"). However the corresponding pixels in images 3, 6, and 8 have the darker of their 2-tones present.

20

Each pixel in the resulting 8-image tonagram will consequently have such an 8-bit binary code in which the corresponding pixel in each of the constituent images is shown to be darker ("0") or lighter ("1"), depending on its position in the code.

25

The left most image 102 on the bottom row of Figure 13 displays the 8-image tonagram of the images shown at the top of that figure. As can be seen, most of the latent images within the tonagram are well concealed. In this respect, it will be appreciated that the tonagram of this embodiment does not employ a visible image.

30

Any of the individual images making up the 8-image tonagram can be readily extracted and reconstituted using the logical "and" command. When two binary codes are subjected to the "and" command, they are combined using the following rules for each corresponding pair of binary digits:

35

0 + 0 = 0

0 + 1 = 0

1 + 0 = 0

1 + 1 = 1

5

Thus, if one wishes to extract the sixth image from the 8-image tonagram, then all pixels of the tonagram are mathematically subjected to an "and" operation with the code 00100000. This has the effect of forcing all of the digits in the answer to become 0's, except for the digit in the sixth position, which becomes "1" if a "1" existed in that position in the tonagram pixel, or "0" if a "0" existed in that position in the tonagram pixel. By this means the tones for the sixth image at each pixel is extracted.

The process shown to the right of the 8-image tonagram in Figure 13 involves a logical and operation with a screen 103 consisting entirely of pixels having the code 10000000. As can be seen in the resulting image 104 (second from the right on the bottom line of figure 13), this results in extraction of the left most of the original images (top line of figure 13), albeit in tonally compressed form. In the final process shown on the right of the bottom line in Figure 13, the extracted image 105 is now decompressed (that is, is stretched into the full tonal range), returning the original image at the top left of figure 13.

It will be apparent to persons skilled in the art that further variations on the disclosed embodiments fall within the scope of the invention.

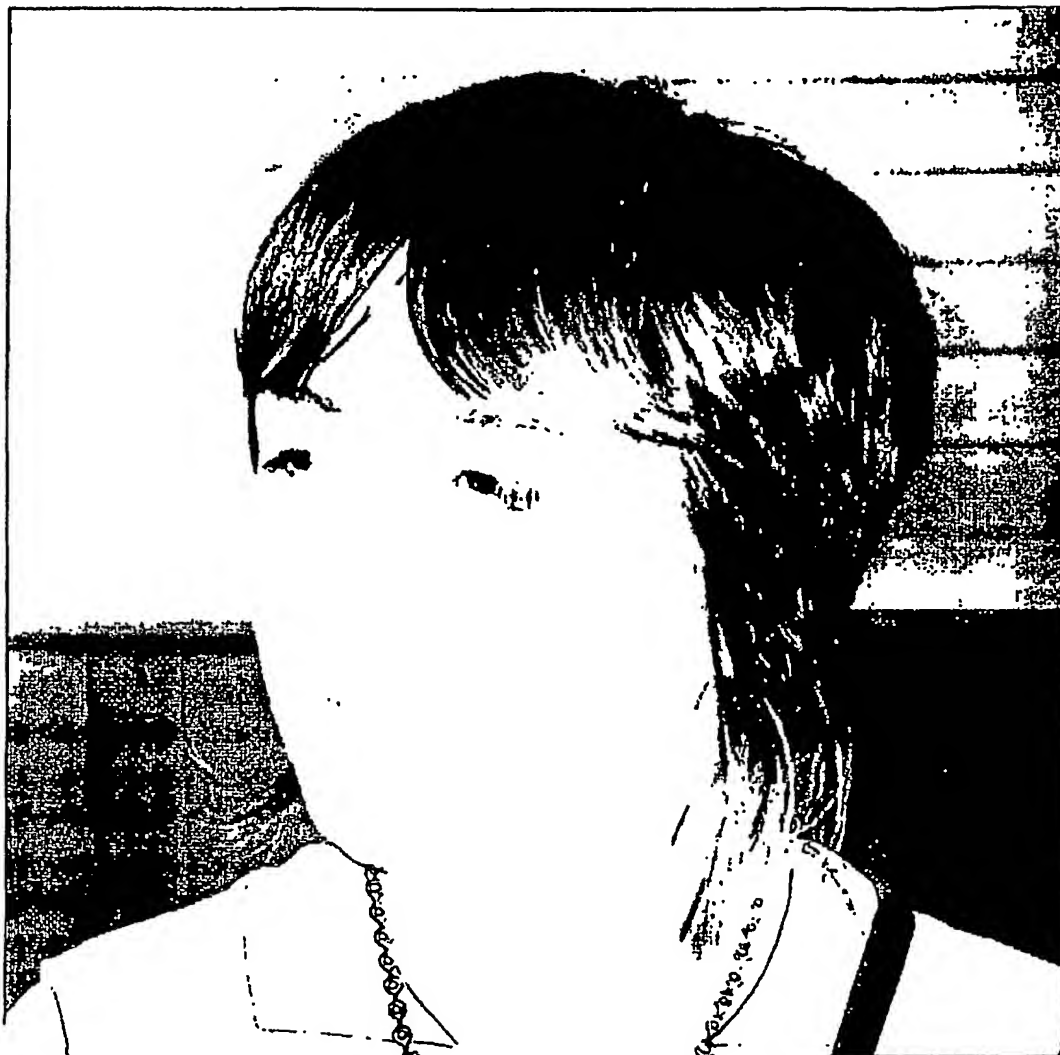


Figure 1

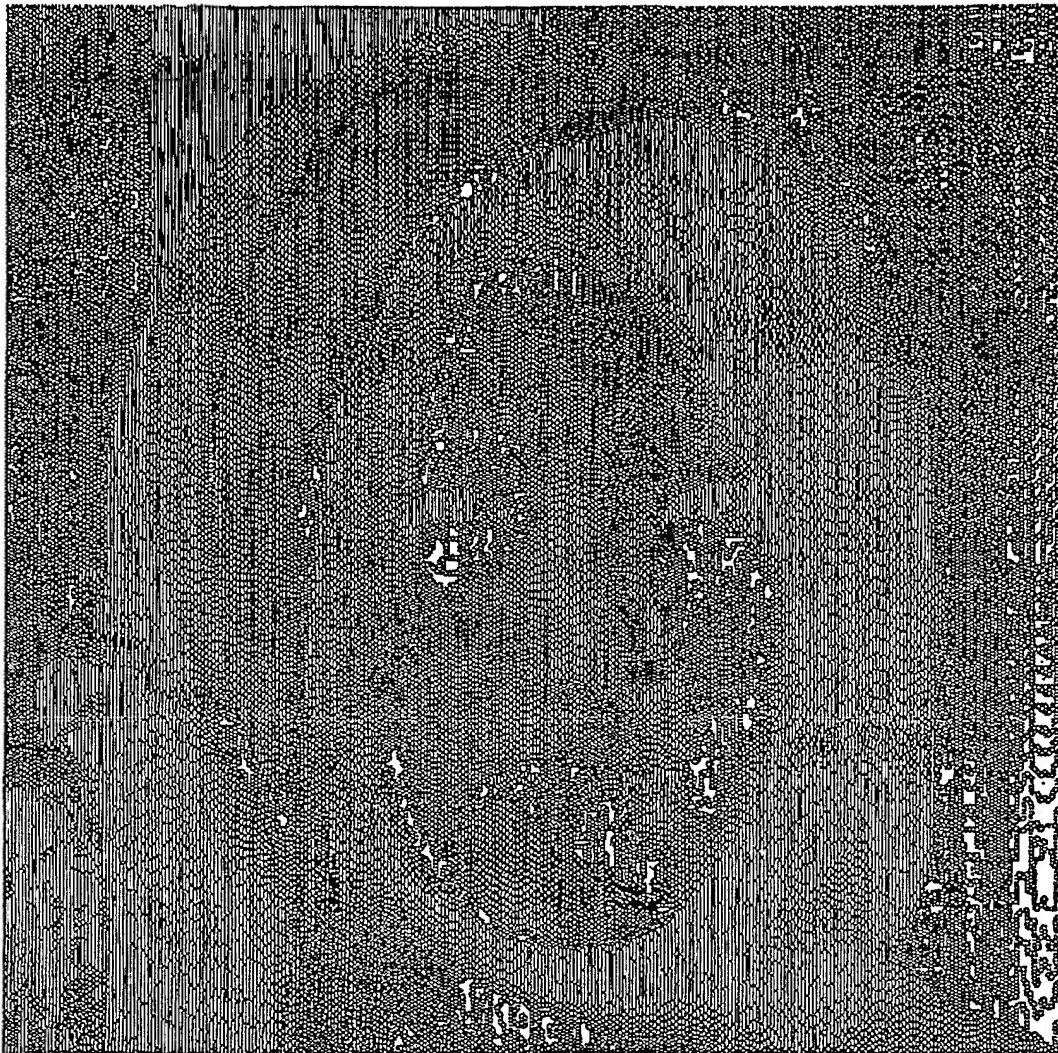


Figure 2

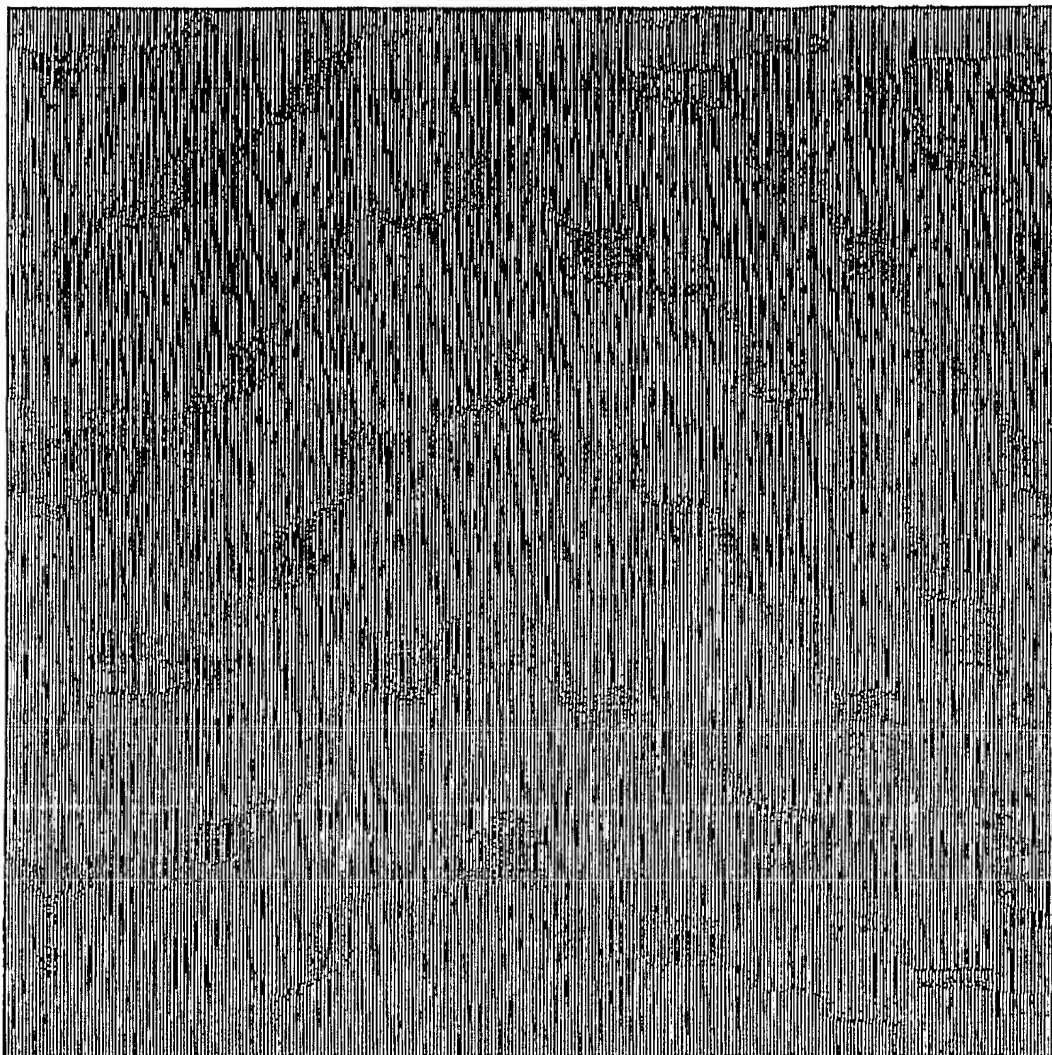


Figure 3



Figure 4

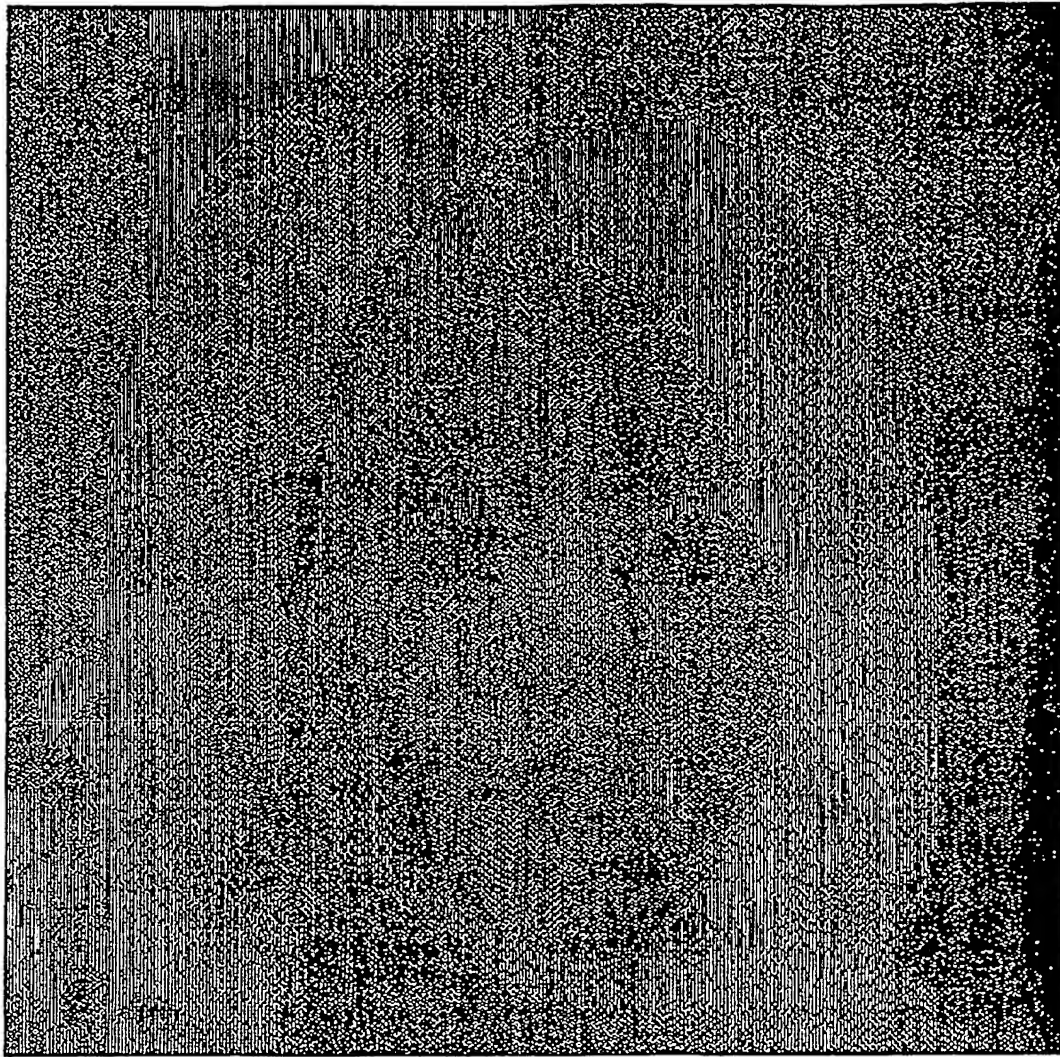


Figure 5



Figure 6

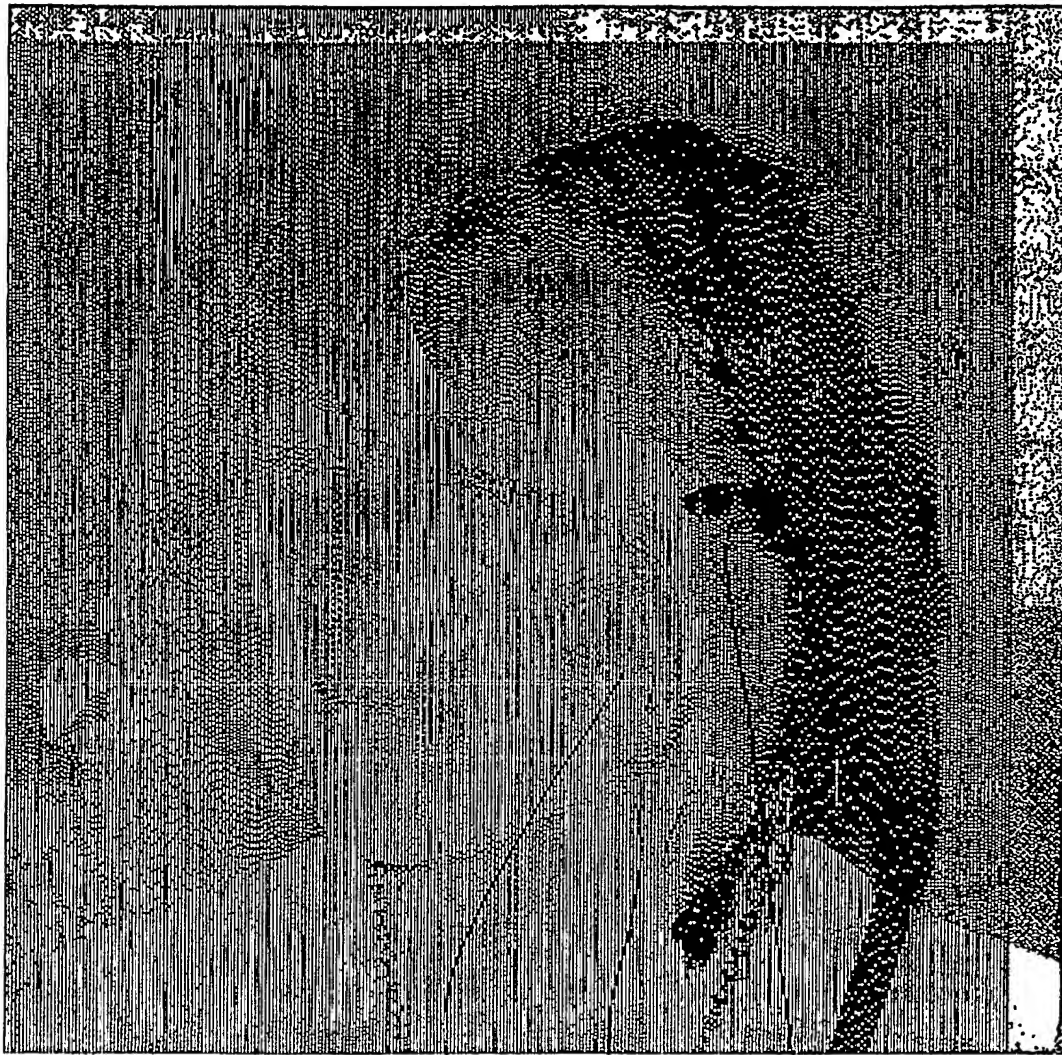


Figure 7

11

12

13

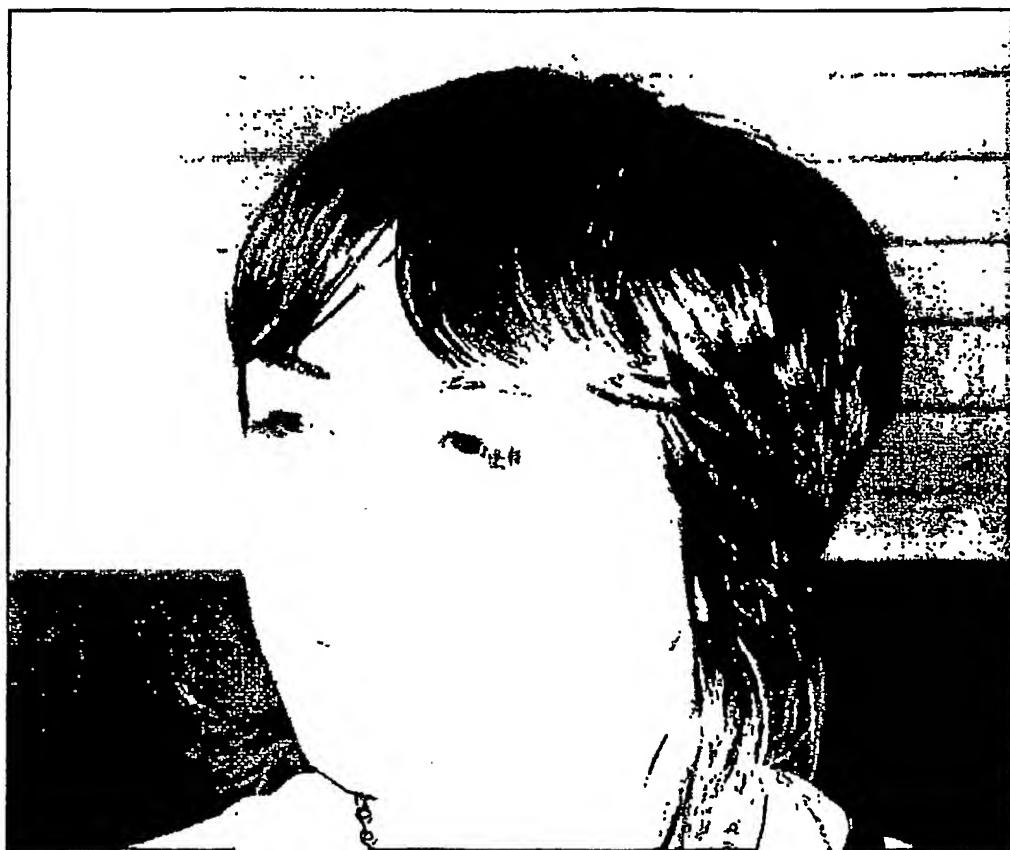


Figure 8



Figure 9




Figure 10

20

21




Figure 11

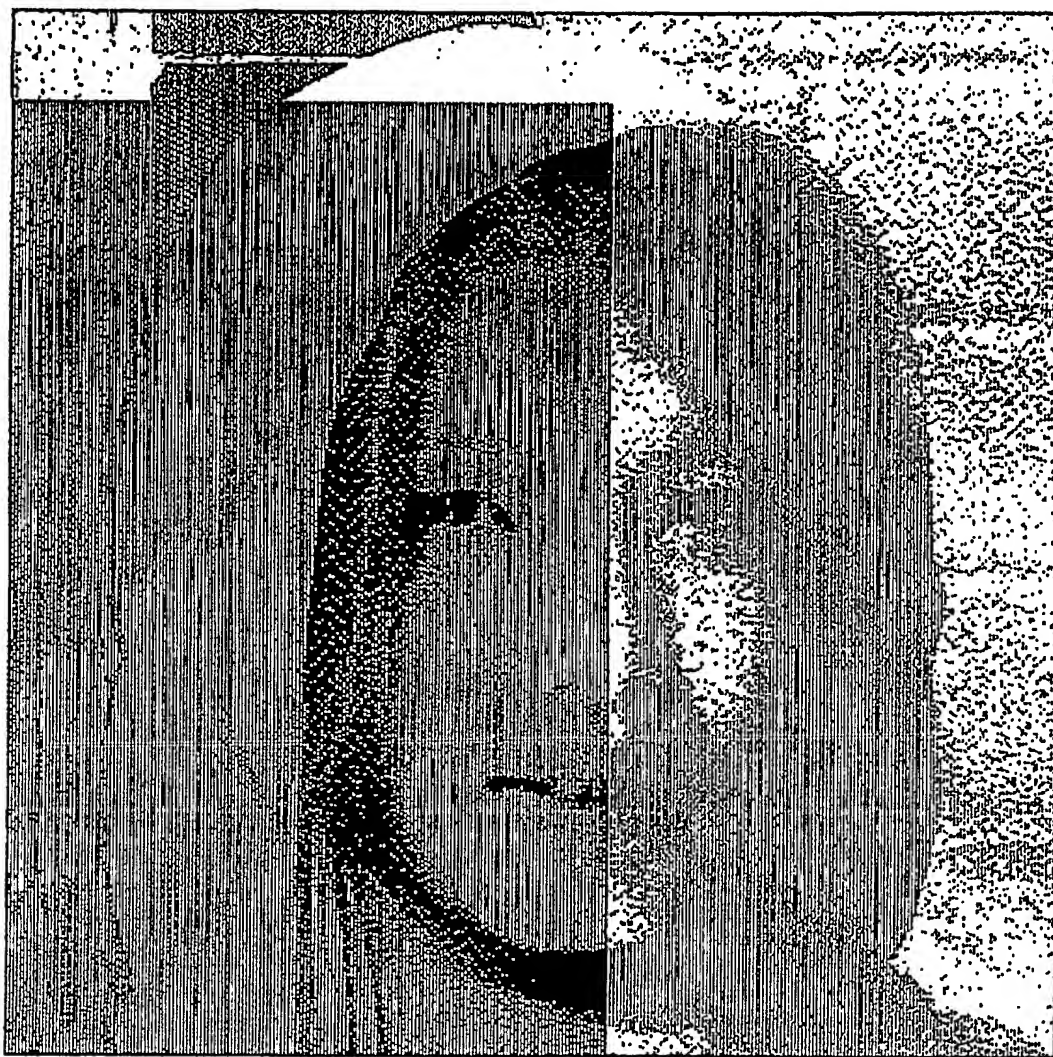

30

Figure 12

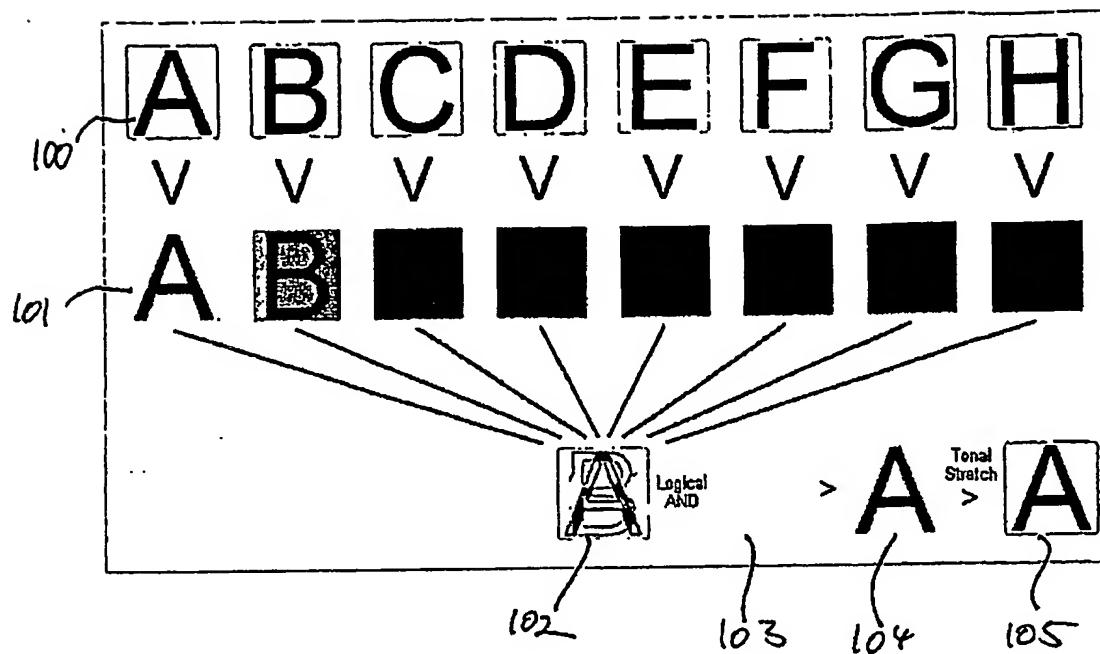

**Figure 13**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**